

## BTR4A-5

BS CODE: 300667

VOLTAGE **12V**

CCA **35A**


CAPACITY 20HR **2.4Ah**

CAPACITY 10HR **2.3Ah**




### DIMENSIONS

<b>LENGTH</b>	113 ±2mm	4.45 ±0.08inch
<b>WIDTH</b>	48 ±2mm	1.89 ±0.08inch
<b>TOTAL HEIGHT</b>	85 ±2mm	3.35 ±0.08inch
<b>WEIGHT</b>	0.96 kg ±5%	2.12 lbs ±5%

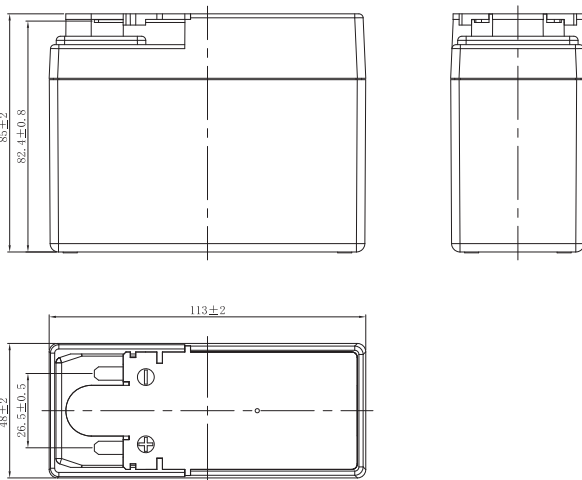

### TERMINAL (mm)


**POLARITY**

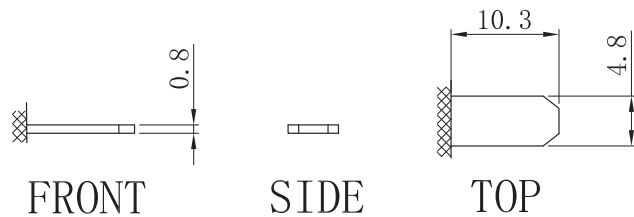

### SLA FEATURES

- FACTORY ACTIVATED**  
AGM (Absorbent Glass Mat) technology.
- READY TO USE**  
Just plug & play.
- NO MAINTENANCE**  
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**  
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**  
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

### MOUNTING ANGLE

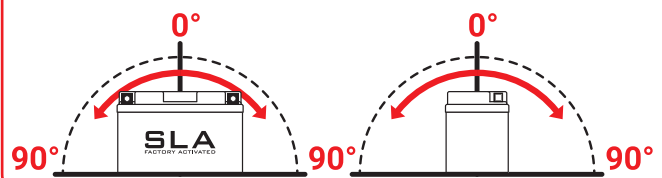

### UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTR4A-BS	-