

BTX14AHL/BB14L-A2/B2

BS CODE: **300759**

VOLTAGE **12V**

CCA **210A**

CAPACITY 20HR **14.7Ah**

CAPACITY 10HR **14.0Ah**




DIMENSIONS

LENGTH	133 ±2mm	5.24 ±0.08inch
WIDTH	90 ±2mm	3.54 ±0.08inch
TOTAL HEIGHT	164 ±2mm	6.46 ±0.08inch
WEIGHT	4.4 kg ±5%	9.7 lbs ±5%



TERMINAL (mm)


POLARITY

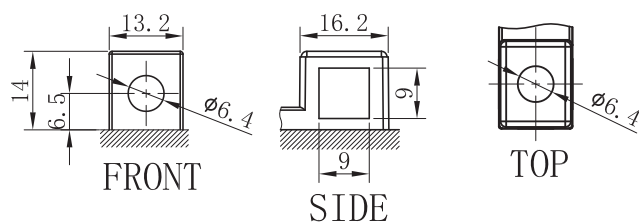

SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

MOUNTING ANGLE

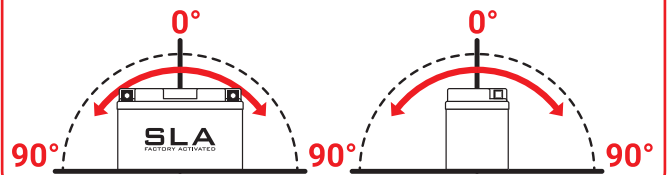

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTX14AHL-BS	BB14L-A2/12N14-3A BB14L-B2