

BTX14L

BS CODE: **300760**

VOLTAGE **12V**

CCA **200A**


CAPACITY 20HR **12.6Ah**

CAPACITY 10HR **12.0Ah**



DIMENSIONS

LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	87 ±2mm	3.43 ±0.08inch
TOTAL HEIGHT	145 ±2mm	5.71 ±0.08inch
WEIGHT	4.31 kg ±5%	9.5 lbs ±5%

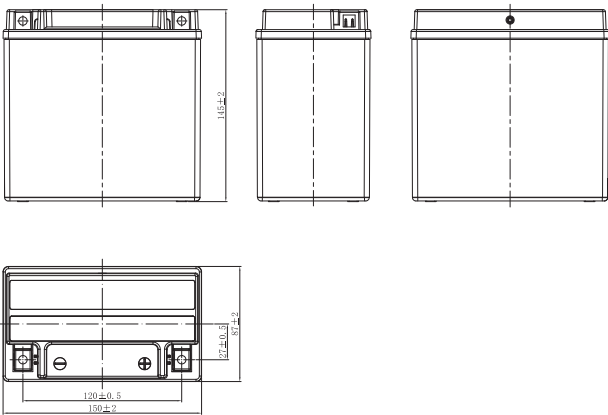


TERMINAL (mm)

POLARITY		
FRONT	SIDE	TOP

SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

MOUNTING ANGLE

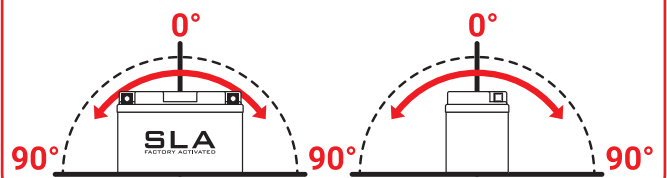

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTX14L-BS	-