

## BTX20H

BS CODE: **300688**

VOLTAGE **12V**

CCA **310A**

CAPACITY 20HR **18.9Ah**


CAPACITY 10HR **18.0Ah**



DIMENSIONS		
LENGTH	175 ±2mm	6.89 ±0.08inch
WIDTH	87 ±2mm	3.43 ±0.08inch
TOTAL HEIGHT	155 ±2mm	6.1 ±0.08inch
WEIGHT	5.93 kg ±5%	13.07 lbs ±5%

TERMINAL (mm)	
POLARITY	
FRONT	
SIDE	
TOP	

SLA FEATURES	
	<b>FACTORY ACTIVATED</b> AGM (Absorbent Glass Mat) technology.
	<b>READY TO USE</b> Just plug & play.
	<b>NO MAINTENANCE</b> VRLA (Valve Regulated Lead Acid) design.
	<b>SPILL-PROOF DESIGN</b> Factory sealed & electrolyte held in a glass fiber mat.
	<b>NO ACID HANDLING</b> Very safe.
	<b>HIGH STARTING POWER &amp; EXTENDED CYCLE LIFE</b>

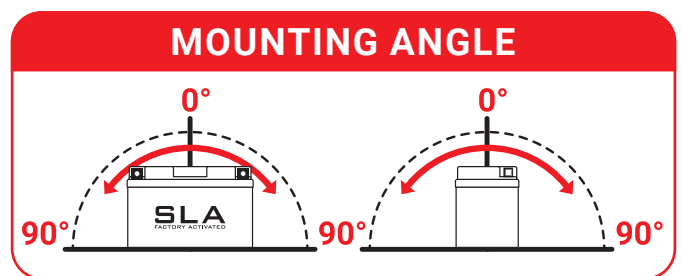

UPGRADE FOR			
SLA MAX	SLA	MF	DRY
-	-	BTX20-BS	-