

BGZ16HL

BS CODE: **300932**

VOLTAGE **12V**

CCA **240A**


CAPACITY 20HR **16.8Ah**

CAPACITY 10HR **16.0Ah**








DIMENSIONS

LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	89 ±2mm	3.5 ±0.08inch
TOTAL HEIGHT	145 ±2mm	5.71 ±0.08inch
WEIGHT	5.4 kg ±5%	11.9 lbs ±5%

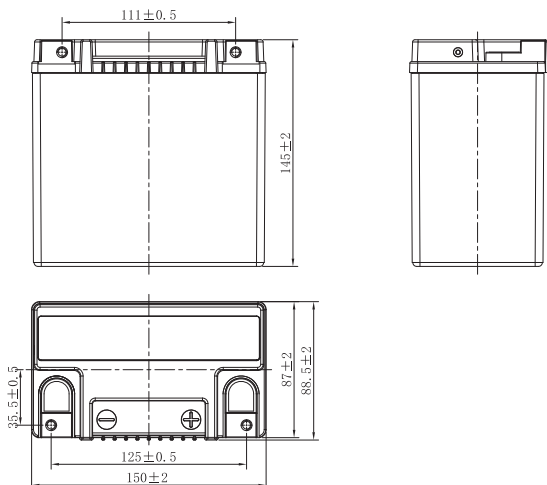


TERMINAL (mm)

POLARITY



LEFT TERMINAL



RIGHT TERMINAL

SLA MAX FEATURES



FACTORY ACTIVATED

AGM (Absorbent Glass Mat) technology.



READY TO USE

Just plug & play.



NO MAINTENANCE

VRLA (Valve Regulated Lead Acid) design.



SPILL-PROOF DESIGN

Factory sealed & electrolyte held in a glass fiber mat.



NO ACID HANDLING

Very safe.



EXTREME VIBRATION RESISTANCE

Reinforced battery case.



MAXIMUM STARTING POWER & EXTENDED CYCLE LIFE


20% higher than SLA CCA.



SUPERIOR CAPACITY

20% higher than SLA capacity.

MOUNTING ANGLE

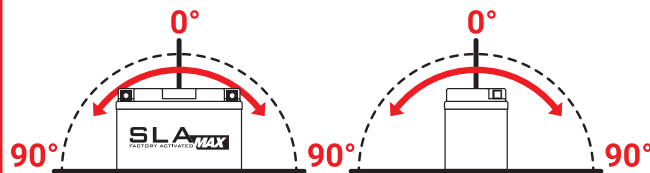

UPGRADE FOR

SLA MAX	SLA	MF	DRY
	BTX14L	BTX14L-B5	