

BGZ20HL

BS CODE: **300939**

VOLTAGE **12V**

CCA **360A**


CAPACITY 20HR **21.1Ah**

CAPACITY 10HR **20.0Ah**








DIMENSIONS

LENGTH	176 ±2mm	6.93 ±0.08inch
WIDTH	89 ±2mm	3.5 ±0.08inch
TOTAL HEIGHT	154 ±2mm	6.06 ±0.08inch
WEIGHT	6.96 kg ±5%	15.34 lbs ±5%

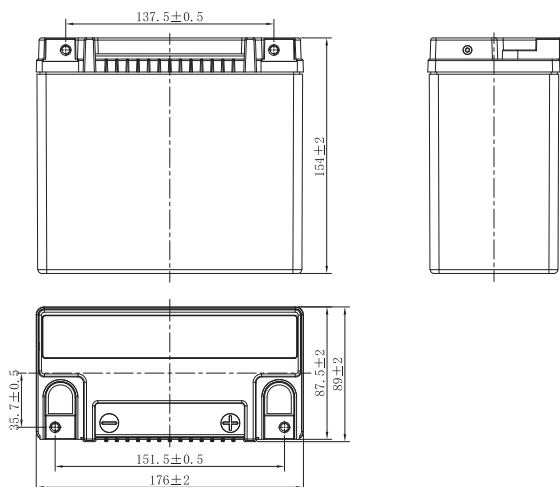


TERMINAL (mm)

POLARITY



LEFT TERMINAL



RIGHT TERMINAL

SLA MAX FEATURES



FACTORY ACTIVATED

AGM (Absorbent Glass Mat) technology.



READY TO USE

Just plug & play.



NO MAINTENANCE

VRLA (Valve Regulated Lead Acid) design.



SPILL-PROOF DESIGN

Factory sealed & electrolyte held in a glass fiber mat.



NO ACID HANDLING

Very safe.



EXTREME VIBRATION RESISTANCE

Reinforced battery case.



MAXIMUM STARTING POWER & EXTENDED CYCLE LIFE


20% higher than SLA CCA.



SUPERIOR CAPACITY

20% higher than SLA capacity.

MOUNTING ANGLE

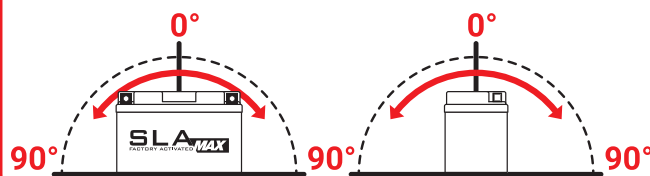

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	BTX20HL	BTX20L-BS BTX20HL-BS	BB18L-A