

BGZ32HL

BS CODE: **300935**

VOLTAGE **12V**

CCA **500A**


CAPACITY 20HR **33.7Ah**

CAPACITY 10HR **32.0Ah**








DIMENSIONS

LENGTH	170 ±2mm	6.69 ±0.08inch
WIDTH	133 ±2mm	5.24 ±0.08inch
TOTAL HEIGHT	175 ±2mm	6.89 ±0.08inch
WEIGHT	10.38 kg ±5%	22.88 lbs ±5%

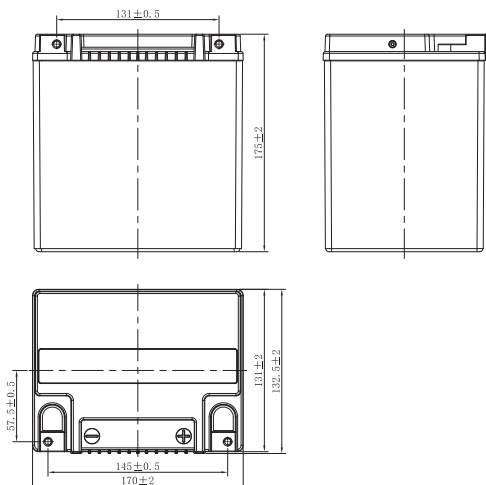


TERMINAL (mm)

POLARITY



LEFT TERMINAL



RIGHT TERMINAL

SLA MAX FEATURES



FACTORY ACTIVATED

AGM (Absorbent Glass Mat) technology.



READY TO USE

Just plug & play.



NO MAINTENANCE

VRLA (Valve Regulated Lead Acid) design.



SPILL-PROOF DESIGN

Factory sealed & electrolyte held in a glass fiber mat.



NO ACID HANDLING

Very safe.



EXTREME VIBRATION RESISTANCE

Reinforced battery case.



MAXIMUM STARTING POWER & EXTENDED CYCLE LIFE


20% higher than SLA CCA.



SUPERIOR CAPACITY

20% higher than SLA capacity.

MOUNTING ANGLE

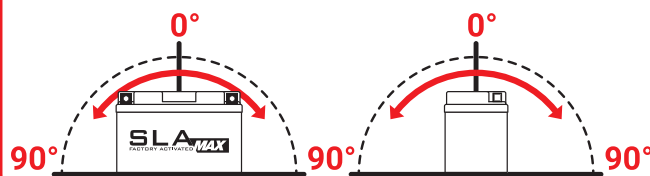

UPGRADE FOR

SLA MAX	SLA	MF	DRY
	BIX30L	BIX30L-BS	BB30L-B