


RACING & OFF ROAD

Designed for the most demanding riders, looking for higher and safer performance, faster acceleration, highly reduced weight and much longer battery life. The very low self-discharge provide the possibility to start an engine after a very long period of storage, even in very cold temperature conditions. BS LiFePO4 battery range cover most of the existing circulating parc fitments. Tested & Approved by Official Racing Team.


FEATURES

- Ready to use**
No need for preparation, just plug & play
- Lighter weight**
Up to 70% lighter than lead acid batteries
- Multi-positioning mounting**
Up to 180°
- Extensive cycle life**
Over 2 000 cycles
- Fast charging**
Super fast charging capabilities
- Very low self-discharge**
Can start engine after a long period of storage
- Cold temperature performance**
Impressive cold cranking performance
- Heat resistance**
Heat temperature resistance up to 230°C
- Robust brass terminals**
For enhanced electrical performance
- Very safe and environmentally friendly**
No Acid, no leakage risk, no heavy metal, no toxic
- Waterproof design**
Silicone sealant for excellent sealing performance



Different spacers are included with each battery to fit lead acid battery casing easily

MOUNTING ANGLES

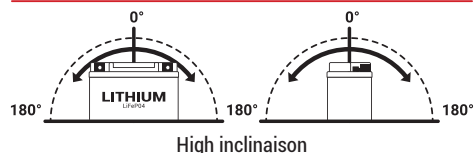

COMPATIBLE CHARGERS

- BS 10** Battery size up to 20Ah
- BS 30** Battery size up to 60Ah
- BK 20** Battery size up to 40Ah

BS TYPE	BS CODE	POWER (Wh)	CCA (A)	CAPACITY AH (10hr)	DIMENSIONS (±2mm)			POLARITY	TERMINAL	REPLACEMENT - MOST POPULAR MODELS		
					L	W	H			SLA / SLA MAX	MF	DRY
BSLi-01	360101	24	140	2	92	52	90	+	M6	Replacement for KTM Original Equipment LFP001		
BSLi-02	360102	24	140	2	107	56	85	-	M5	12N5.5-3B BB4L-B BB5L-B BB7C-A BB7L-B2 BTX4L-B BTX4L-B/BT25S BTX5L-BT26S BTX7L BTZ7S BTZ7V BTZ8V BB7-A BB9-B BTX7A BTX9 BT7B-4 BT9B-4	BTX4L-B BTX5L-B BTX7L-B BTZ7S-B	12N5.5-3B 12N7A-3A BB4L-B BB5L-B BB6.5L-B BB7C-A BB7L-B BB7L-B2
BSLi-03	360103	36	210	3	134	65	92	-	M6	BB12A-A/B BB14A-A2 BTX12 BTX14 BTX14H BTX14AH BTX14AH/B BT12B-4 BT14B-4 BT12A BTZ10S BTZ12S BTZ14S	BTX7A-B BT7B-B BT9A-B BT9B-B BTX9-B	12N7-4A 12N9-4B-1 BB7-A BB9-B
BSLi-04/06	360104	48	280	4	134	65	92	+	M6	BB10L-A2/B2 BB12AL-A2 BB16AL-A2 BTX14AH/B BB14L-A2/B2	BTX14AH-B	12N10-3A 12N10-3B 12N14-3A BB10L-A2/B2 BB10L-BP BB12AL-A BB12AL-A2 BB14L-A1/A2 BB14L-B2 BB16AL-A2 BB16-B BB16B-A1 HBB16A-A/B BB18-A
BSLi-05	360105	48	280	4	134	65	92	-	M6	BB10L-A2/B2 BB12AL-A2 BB16AL-A2 BTX14AH/B BB14L-A2/B2	BTX14AH-B	12N10-3A 12N10-3B 12N14-3A BB10L-A2/B2 BB10L-BP BB12AL-A BB12AL-A2 BB14L-A1/A2 BB14L-B2 BB16AL-A2 BB16-B BB16B-A1 HBB16A-A/B BB18-A
BSLi-07	360107	60	300	5	148	86	105	+	M6	BTX16 BTX16H	BTX16-B BTX16-B-1	BB16L-B BB16L-B
BSLi-08	360108	60	300	5	148	86	105	-	M6	BB16CL-B BTX14L BTX14HL	BTX14L-B	BB16L-B BB16L-B
BSLi-09	360109	72	360	6	148	86	105	+	M6	BTX20H BTX20CH	BTX20-B BTX20CH-B BTX20A-B	-
BSLi-10	360110	72	360	6	148	86	105	-	M6	BTX20HL BTX24HL/ B50N18L-A/A2/A3	BTX20L-B BTX20HL-B BTX24HL-B	BB18L-A B50-N18L-A B50-N18L-A2/ A3/AT
BSLi-11	360111	96	440	8	165	86	130	+	M6	-	-	B60-N30-A 53034
BSLi-12	360112	96	560	8	165	86	130	-	M6	BIX30L BIX30HL 53030	BIX30L-B	BB30L-B BB30CL-B B60-N30L-A 12N24-3A 52515 53030
BSLi-13	360113	96	560	8	183	79	170	+	M6	51913 SLA12-19	SLA12-19-B	51913 51814