






ORIGINAL EQUIPMENT
OEM
MANUFACTURER


**plug
and
play**


SLA (Sealed Lead Acid) batteries make riders life easier. No more acid handling nor inevitable waiting for battery charge! Everything becomes much more simple! Ready to use, the SLA batteries are Factory Activated, completely spill proof and require no maintenance. A new environment for powersport battery: it becomes a plug & play solution, extremely simple to install and carry! Our SLA offer is the widest ready to use range available on the market.


-  **Factory activated**
AGM (Absorbent Glass mat) technology

-  **Ready to use**
Just plug & play

-  **No maintenance**
VRLA (Valve Regulated Lead Acid) design

-  **Spill proof design**
Factory sealed & electrolyte held in a glass fibre mat

-  **No acid handling**
Very safe

-  **High starting power & extended cycle life**

COMPATIBLE CHARGERS

- BS 10** Battery size up to 20Ah


- BS 15** Battery size up to 30Ah

- BS 30** Battery size up to 60Ah

- BS 60** Battery size up to 120Ah

- BK 20** Battery size up to 40Ah

MOUNTING ANGLES

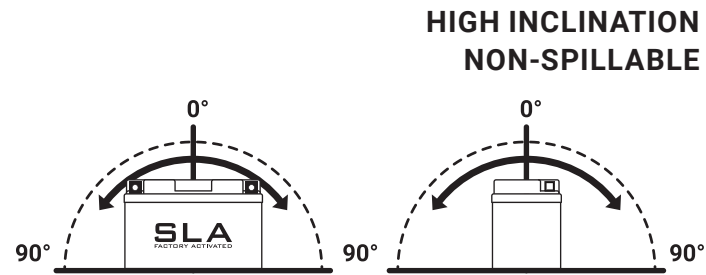

DID YOU KNOW?

BS BATTERY SLA range can replace 95% of Maintenance Free and DRY batteries.

BS BATTERY SLA range is perfectly suitable for e-commerce (air freight, road or sea shipment).

12V	BS BATTERY TYPE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA (EN) A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	BTZ7S	300635	6	6.3	130	113	70	105		A
	BT7B-4	300641	6.5	6.8	110	150	65	93		A
	BTZ7V	300912	6.5	6.8	105	113	70	121		A
	BTZ8V	300890	7	7.4	120	113	70	130		A
	BT9B-4	300642	8	8.4	120	150	68	105		A
	BTZ10S	300636-1	8.6	9	190	150	88	93		A
	BT12-10Z	300913	10	10.5	180	194	59	112		A
	BTZ12S	300637-1	11	11.6	215	150	88	110		A
	BT12B-4	300643	10	10.5	210	150	69	130		A
	BTZ14S	300638-1	11.2	11.8	230	150	88	110		A
	BT14B-4	300644	12	12.6	210	150	69	145		A
	SLA 12-19	300632	17.7	19	235	182	77	168		A
	BT4B-5	300756	2.3	2.4	40	113	38	85		J
	BTR4A-5	300667	2.3	2.4	35	113	48	85		I
	BTX4L+/BTZ5S	300669	4	4.2	65	113	70	85		A
	BTX5L/BTZ6S	300670	5	5.3	90	113	70	105		A
	BTX6.5L	300904	6.5	6.8	85	139	66	100		B
	BTX7L	300673	6	6.3	100	113	70	130		A
	BTX7A	300672	6	6.3	105	150	87	93		A
	BTX9	300674	8	8.4	135	150	87	105		A
	BT12A	300679	10	10.5	175	150	87	105		A
	BTX12	300680	10	10.5	180	150	87	130		A
	BTX14	300681	12	12.6	200	150	87	145		A
	BTX14L	300760	12	12.6	200	150	87	145		A
	BTX14AH/BB14-A2/B2	300758	14	14.7	210	135	90	164		A
	BTX14AHL/BB14L-A2/B2	300759	14	14.7	210	135	90	164		D
	BTX16	300763	14	14.7	230	150	87	161		A
	BTX20CH	300766	18	18.9	270	150	87	161		A
	BTX20H	300688	18	18.9	310	175	87	155		A
	BTX20HL	300689	18	18.9	310	175	87	155		A
	BTX24HL/B50-N18L-A/A2/A3	300770	21	22.1	350	205	87	162		A
	BIX30L	300631	30	31.6	400	165	125	175		A
	12N5.5-3B	300840	5.5	5.8	70	135	60	130		A
	12N5.5-4A/4B	300841	5.5	5.8	70	135	60	130		A
	BB3L-A/B	300842	3	3.2	35	98	56	110		A
	BB4L-B	300665	4	4.2	50	120	70	92		B
	BB5L-B	300671	5	5.3	65	120	60	130		A
	BB7-A	300850	8	8.4	120	135	75	133		B
	BB7C-A	300843	8	8.4	80	129	89	114		A
	BB7L-B2	300836	8	8.4	100	135	75	133		E
	BB9-B	300675	9	9.5	120	135	75	139		A
	BB10L-A2/B2	300677	11	11.6	120	133	90	145		A
	BB12AL-A2	300837	12	12.6	150	134	80	161		B
	BB12A-A/B	300881	13	12.6	150	134	80	161		A
	BB14A-A2	300838	14	14.7	200	134	88	166		B
	BB16AL-A2	300839	16	16.8	160	205	70	162		A
	BB16CL-B	300771	19	20	230	175	100	175		F
	53030	300880	30	31.6	300	178	123	166		C
	6N4-2A/A-4	300916	4	4.2	25	71	71	93		-
	6N6-3B/B-1	300917	6	6.3	50	95	55	117		B
	B49-6	300918	10	10.5	80	91	83	159		B
	B38-6A	300919	13	13.7	105	119	83	161		B
	6N11A-1B/3A	300915	11	11.6	90	121	58	130		B
	6N11A-4A	300914	11	11.6	90	121	58	130		B

6V

TERMINAL TYPE	A	B	C	D	E	F	G	H	I	J